


Oil Pattern Distance	44	Reverse Brush Drop	38	Oil Per Board	50 ul
Forward Oil Total	20.05 mL	Reverse Oil Total	12.35 mL	Volume Oil Total	32.4 mL
Tank Configuration	A Only	Tank A Conditioner	CURRENT	Tank B Conditioner	CURRENT

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	2	10	A	74	0.0	1.4	1.4	3700
2	5L	5R	2	14	A	62	1.4	5.3	3.9	3100
3	7L	7R	2	14	A	54	5.3	9.2	3.9	2700
4	8L	8R	2	18	A	50	9.2	14.3	5.1	2500
5	9L	9R	2	18	A	46	14.3	19.4	5.1	2300
6	10L	10R	3	18	A	63	19.4	27.0	7.6	3150
7	13L	13R	2	22	A	30	27.0	33.2	6.2	1500
8	15L	15R	2	22	A	22	33.2	39.4	6.2	1100
9	2L	2R	0	22	A	0	39.4	44.0	4.6	0

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	A	0	44.0	38.0	-6.0	0
2	15L	15R	2	26	A	22	38.0	30.7	-7.3	1100
3	13L	13R	2	26	A	30	30.7	23.4	-7.3	1500
4	10L	10R	2	26	A	42	23.4	16.1	-7.3	2100
5	7L	7R	2	18	A	54	16.1	11.0	-5.1	2700
6	5L	5R	2	18	A	62	11.0	5.9	-5.1	3100
7	2L	2R	1	14	A	37	5.9	4.0	-1.9	1850
8	2L	2R	0	10	A	0	4.0	0.0	-4.0	0

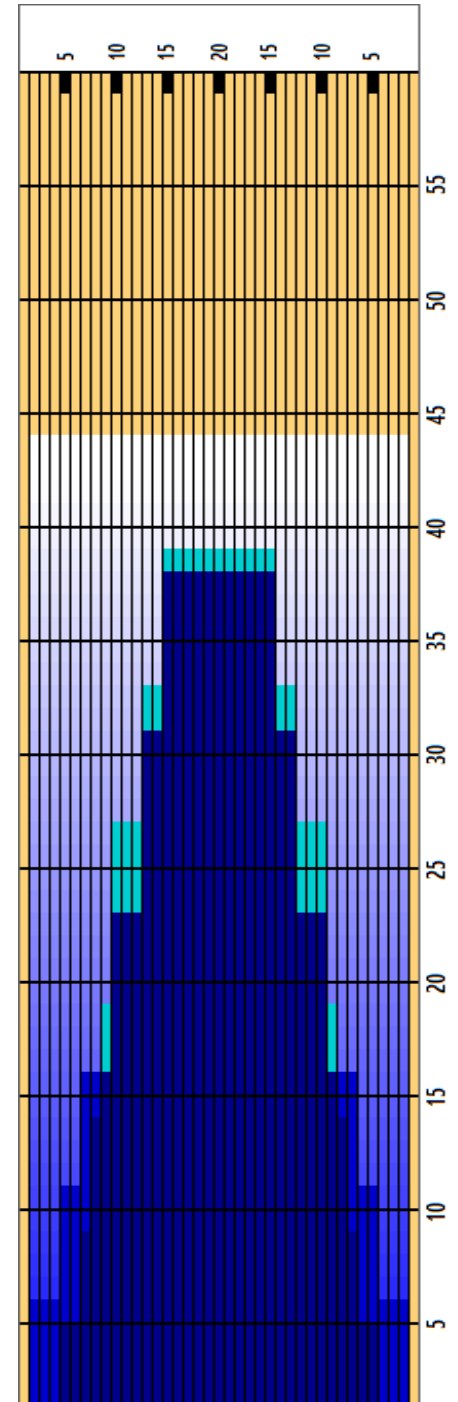

Cleaner Ratio Main Mix: NA Forward
 Cleaner Ratio Back End Mix: NA Reverse
 Cleaner Ratio Back End Distance: NA Combined
 Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside:Middle	Middle:Middle	Inside:Middle	Middle: Inside	Middle:Middle	Middle:Outside
Track Zone Ratio	4.52	1.59	1.06	1.06	1.59	4.52

